

Cumulative Productivity Plot

Synonym: Cumulative Productivity Plot = Hall Plot

One of the [Productivity Diagnostics](#) methods based on correlation between cumulative pressure drawdown:

$$(1) \quad G(t) = \int_0^t (p_{wf}(\tau) - p_e(\tau)) d\tau$$

and [total sandface cumulative offtake/intake](#):

$$(2) \quad Q_t(t) = \int_0^t q_t(\tau) d\tau$$

where

τ	production/injection time
q_t	total sandface flowrate as function of time τ
p_e	drain-area formation pressure as function of time τ
p_{wf}	bottomhole pressure as function of time τ

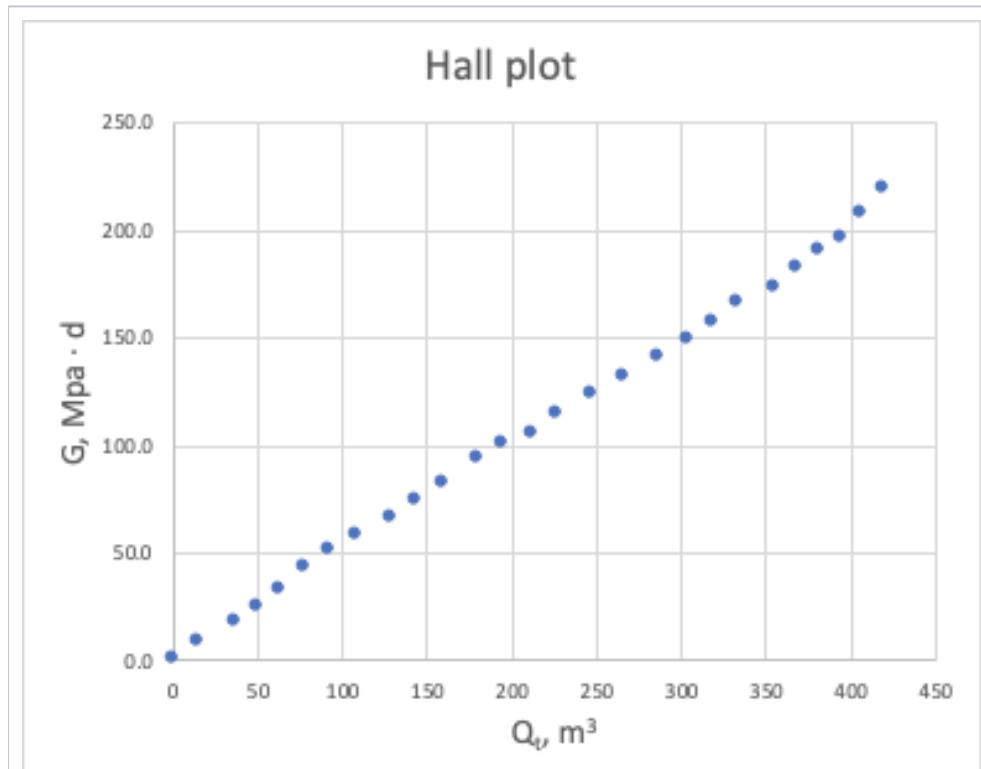


Fig. 1. Hall Plot

It shows unit slope on log-log plot for [stabilized reservoir flow](#):

$$(3) \quad G(t) = J^{-1} Q_t(t)$$

where

J	constant productivity index
---	-----------------------------

Due to integration procedure the [Hall Plot](#) has a better tolerance to uncertainties in [formation pressure](#) and [bottomhole pressure](#) comparing to [Unweighted J-plot](#) and usually results in more accurate estimation of [productivity index](#).

It is highly recommended to plot [sandface flowrates](#) rather than [surface flowrates](#) to achieve better linearity in correlation for [stabilized reservoir flow](#).

Although it is equally applicable to [producers](#) and [injectors](#), due to lack of [BHP](#) and [formation pressure](#) data availability for [producers](#) in most practical cases in the past the [Hall plot](#) analysis was mostly applied for [water injectors](#).

The [pressure drawdown](#) integral $G(t)$ is usually calculated over interpolated values of [formation pressure](#) and [bottomhole pressure](#) :

$$G(t) = \int_0^t (p_{wf}(\tau) - p_e(\tau)) d\tau = \sum_k (p_{wf}(\tau_k) - p_e(\tau_k)) \delta\tau_k$$

See Also

[Petroleum Industry](#) / [Upstream](#) / [Production](#) / [Subsurface Production](#) / [Field Study & Modelling](#) / [Production Analysis](#) / [Productivity Diagnostics](#)